

RECORD OF LAND CORNER MONUMENTATION

SOUTH 1/4 CORNER SECTION 14, T. 3 S., R. 32 E., W.M.

10	11	11	12
15	14	14	13
15	14	14	13
22	23	23	24

ORIGINALLY ESTABLISHED BY: George S. Pershin, U.S. Deputy Surveyor

CONTRACT NUMBER: 430

CONTRACT DATE: March 23, 1882

SUBSEQUENT SURVEYS:

- ▶ 1977 Remonumentation by Craig L. Wanless, BLM Cadastral Surveyor, under special instructions dated May 3, 1957, Group No. 350, approved May 6, 1957.

ORIGINAL DESCRIPTION: Set a basalt stone 15 x 10 x 8 ins 10 ins in ground on SE slope for 1/4 sec. cor marked 1/4 on N. face
 A Fir 5 ins. dia. brs. N.21°E. 47 lks dist marked 1/4 S. B.T.
 A Pine 15 ins. di. brs. S.76°W. 8 lks. dist. marked 1/4 S. B.T.

1977 DESCRIPTION: The 1/4 sec. cor. of secs. 14 and 23, determined at record bearing and distance from the only remaining original bearing tree:
 A pine, 15 ins. diam., bears S. 76° W., 8 lks. dist., with scribe marks 1/4 BT visible on partially open blaze.
 At the corner point
 Set an iron post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. (diagram shown) from which a new bearing tree
 A ponderosa pine, 28 ins. diam., bears N. 11° W., 81 lks. dist., mkd. 1/4 S14 BT.

EVIDENCE FOUND: Found a 2 1/2" galvanized iron pipe with 3 1/4" BLM brass cap marked as shown below, projecting 1" above ground, with no visible mound of stone.

From which, I also found the following bearing trees:

- ▶ A ponderosa pine, 19" dbh, bears S.76°W., 5.3 ft. with fully healed blaze (1882 GLO bearing tree)
- ▶ A ponderosa pine, 30" dbh, bears N.11°W., 53.5 ft. with fully healed blaze (1977 BLM bearing tree)

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

I accept the found B.L.M. monuiment as a perpetuation of the original corner.

From which, I SET NEW REFERENCE POINTS:

- ▶ A 5/8"x 24" iron pin bears S.46°36'E., 14.88 ft., with attached 2" aluminum cap marked *RP 1 2024 PLS 69454*
- ▶ A 5/8"x 24" iron pin bears N.46°42'W., 23.00 ft., with attached 2" aluminum cap marked *RP 2 2024 PLS 69454*

CORNER MONUMENT MARKED:




Painted a 6 inch red band around each bearing tree, and also painted blazes red and attached new USFS 54-3 and 54-9 signs. Used a hand compass with 14° east declination and an EDM to verify record bearings and distances to BT's. Used RTK GPS to measure reference points. Bearings are geodetic, derived by GPS observation at the corner.

RESTORATION BY, STAMP AND DATE:

Work performed May 15, 2024 by:

Jason L. Hatfield, PLS

USDA FOREST SERVICE
 NORTHEAST OREGON LAND ZONE
 1550 Dewey Avenue, Suite A
 Baker City, OR 97814
 (541) 523-1283

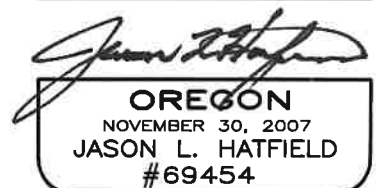

EXPIRES: 6/30/2025

24-078-B