


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner not previously established.

T 1 N R 35 E T-03



DESCRIPTION OF CORNER EVIDENCE FOUND:


None.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 2 1/2" x 30" aluminum pipe, 27" in the ground, with 3" aluminum cap, marked as shown below, from which:

NEW BEARING OBJECT:

- A 14" Douglas Fir bears North 13° East, a distance of 16.40 feet, marked C 1/4 S30 BT.
- A 6" Ponderosa Pine bears South 49° East, a distance of 24.70 feet, marked C 1/4 S30 BT.
- An 8" Ponderosa Pine bears South 44° West, a distance of 11.90 feet, marked C 1/4 S30 BT.
- A 4" White Fir bears North 53° West, a distance of 19.65 feet, marked X BT.

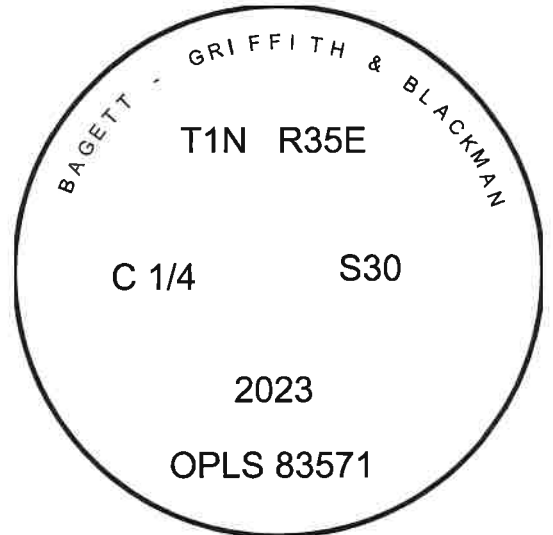

I hereby certify that the corner was monumented on October 31, 2023.



Renewal Date: June 30, 2025

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 14° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.

T-03

23-104-C