

OREGON CORNER RESTORATION FORM

COUNTY: Umatilla. DATE: 01/26/23.

CORNER DESIGNATION: E-13, the Southeast Corner of Section 4, Township 3 North, Range 28 East, W.M.

PREVIOUS RENEWALS/SURVEYS ETC: Corner was originally established by N.H. Gates under Contract No. 84, dated July 22, 1859. Gates set a post in earth mound. This corner was reestablished by double proportion measurement on Survey No. S-14-B in 1981 and monumented with a brass cap on galv. iron pipe monument.

MONUMENT AND ACCESSORIES FOUND: Found 2 1/2" brass cap on iron pipe 4" below ground level in unfarmed CRP field, stamped as shown in Monument Marking Detail.

MONUMENT MARKING DETAIL:

T3N R28E
S4|S3

S9|S10
1981
PLS 933

MAINTAINED CORNER MONUMENT:

New accessories:

A 5/8"X24" rebar with blue plastic cap marked "Wells Surveying 54657PLS" bears N 34°14'34" E, 22.47', at railroad tie gate post. Nailed bearing object sign and Witness Post sign to railroad tie.

A 5/8"X24" rebar with blue plastic cap marked "Wells Surveying 54657PLS" bears S 67°06'47" E, 32.22', 1'+/- West of UECA pole no. 3N28E030001. Nailed bearing object sign to pole.

A pink Deep-1 magnet buried 24" in the ground bears S 35°02'51" E, 59.07'. Buried bearing object sign with magnet.

A Blue Deep-1 magnet buried 24" in the ground bears S 38°04'30" W, 45.89'. Buried bearing object sign with magnet.

Attached witness post sign to 3.5' tall wood post 6" North of monument.

Courses to corner accessories are State Plane Grid bearings and distances.

LOCATION AND COMMENTS: Corner falls in unfarmed CRP field 20'+/- South of existing East-West running fence line.

OREGON STATE PLANE COORDINATE, North Zone NAD 83(91), International Feet Units:


N: 766375.92

E: 8505518.06

FIRM: Wells Surveying
P.O. Box 1696
Pendleton, OR 97801

Surveyor's Seal

\3N28E-13

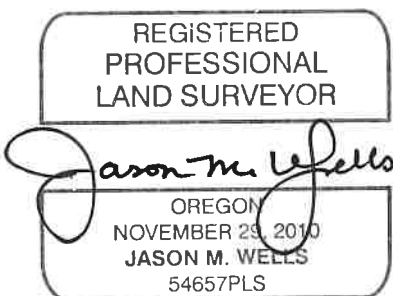

RENEWS: 6:30:24

24-004-c