

**OREGON CORNER RESTORATION FORM**

Section 7,8  
County Umatilla

Township 3N  
Date: 08/18/09

Range 29E

**Corner Designation:** 3N29G5

1/4 Corner common to sections 7 and 8, T3NR29E.

- Condition Report Only
- Not Found
- Remonumented
- Unrecorded
- Surveyed In
- Referenced Out


**Previous Renewals / Surveys, etc.**

Originally Surveyed by N.H. Gates in 1859. He set a post in a mound of earth. Survey Q-511-Ax records finding a stone at this corner location.


**Monuments and Accessories Found: (Condition and Source)**

A stone.

**Diagram**



**Sketch**

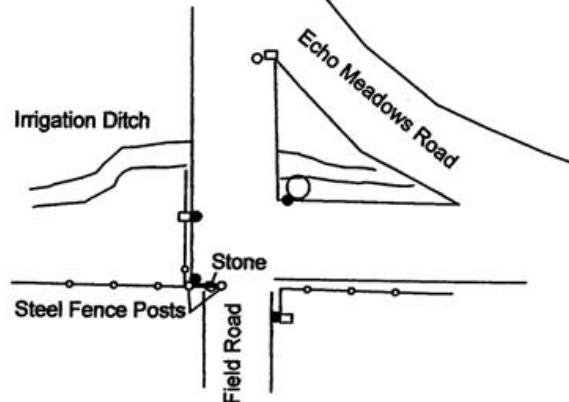

NAD 83/91  
OREGON STATE PLANE NORTH  
INTERNATIONAL FEET

N763941.42  
E8527365.89

LAT - 45° 45' 18.11097" N  
LON - 119° 13' 32.320911" W

**Monument (s) Set (Procedures and Description)**

None.

**References Set:**

- A 3/8" x 30" Iron rebar w/ypc #43406 lies N 45°00' E, 40.03'.
- A 3/8" x 30" Iron rebar w/ypc #43406 lies S 30°00' W, 24.82'.
- A 3/8" x 30" Iron rebar w/ypc #43406 lies N 79°00' W, 3.52'.
- A 3/8" x 30" Iron rebar w/ypc #43406 lies S 53°00' W, 32.39'.

**Location and Comments**

The corner is .5 miles south of the intersection of Echo Meadows Road and Correa Lane.

**Compass Declination**  
17° E

**Surveyors Seal**

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Robert D. English*

OREGON  
JANUARY 11, 2005  
ROBERT DOUGLAS ENGLISH  
43406LS

**RECEIVED BY:**

Date: 9-09  
Rec'd By: KH  
No. 09-196-R

**Firm / Agency**

Survey One, LLC.  
P.O. Box 382  
Pendleton, OR 97801  
(541) 276-2055

RENEWAL DATE: 12/31/09