

OREGON CORNER RESTORATION FORM

Section 8 Township 3N
County Umatilla Date: 03/11/10

Range 29E

Corner Designation: 3N29G8

Center East 1/16th Corner to section 8, T3NR29E.

- Condition Report Only
- Not Found
- Remonumented
- Unrecorded
- Surveyed In
- Referenced Out

Previous Renewals / Surveys, etc.

PLS 933 set a 2 1/2" Brass Cap in Survey #98-11-B.


Monuments and Accessories Found: (Condition and Source)

Found a 2 1/2" Brass Cap just East of the Echo Wastewater Settling Pond fence.

Diagram



Sketch

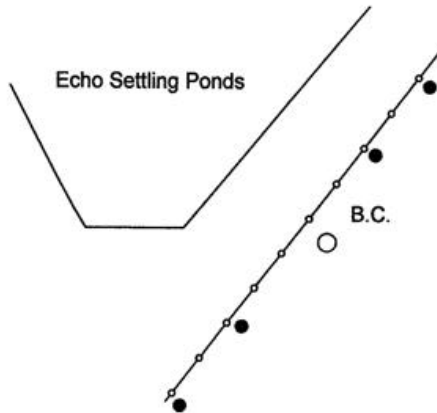

NAD 83/91
OREGON STATE PLANE NORTH
INTERNATIONAL FEET

N764049.71
E8531400.02

LAT - 45° 45' 18.54788" N
LON - 119° 12' 35.40730" W

Monument (s) Set (Procedures and Description)

None. Replaced Witness Corner sign on existing guard post.

References Set:

- A 5/8" Iron rebar, w/rpc, #43406 lies N 27°30' E, 18.35'.
- A 5/8" Iron rebar, w/rpc, #43406 lies S 56° W, 32.68'.
- A 5/8" Iron rebar, w/rpc, #43406 lies N 33° E, 27.96'.
- A 5/8" Iron rebar, w/rpc, #43406 lies S 70° W, 13.55'.

Location and Comments

The monument is near the Southeast corner of the Echo Settling Ponds. Accessible by Stanfield Irrigation District road along canal.

Compass Declination
17° E

Surveyors Seal

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. English
OREGON
JANUARY 11, 2005
ROBERT DOUGLAS ENGLISH
43406LS

RECEIVED BY:

Date: 1-11
Rec'd By: KE
No. 11-12-2

Firm / Agency

Survey One, LLC.
P.O. Box 382
Pendleton, OR 97801
(541) 276-2055

RENEWAL DATE: 12/31/11