

**OREGON CORNER RESTORATION FORM**

Section 10 Township 3N Range 29E  
 County Umatilla Date: May 1, 2008

Corner Designation: 3N29J17


Corner to sections 10, 11, 14, and 15, T3N, R29E,  
 W.M., Umatilla County, Oregon.

Condition Report Only  
 Not found  
 Remonumented  
 Unrecorded  
 Surveyed in  
 Referenced out


Previous Renewals / Surveys, etc.

Corner originally set by N. H. Gates under contract No. 84 dated July 22, 1859. His record reads: Set post for corner to Sections 10, 11, 14 & 15 in mound of earth &c., as per instructions. Mr. Peter Zahner in the survey filed in the Record of Private Surveys Book 1, Page 103 remonumented the original corner. His record reads: I renew this corner by setting a rock 6"x7"x18" with charcoal under it.

Monument and Accessories found: ( condition and source )  
 None. The position falls in the center of the County Road.

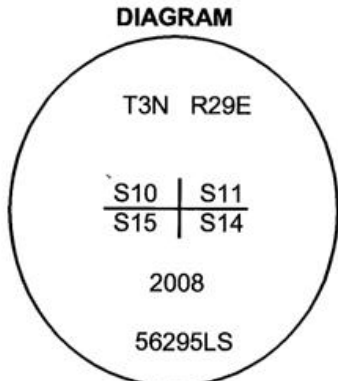

- ⊙ = Brass Cap
- = Rebar Reference
- = P.K. Nail

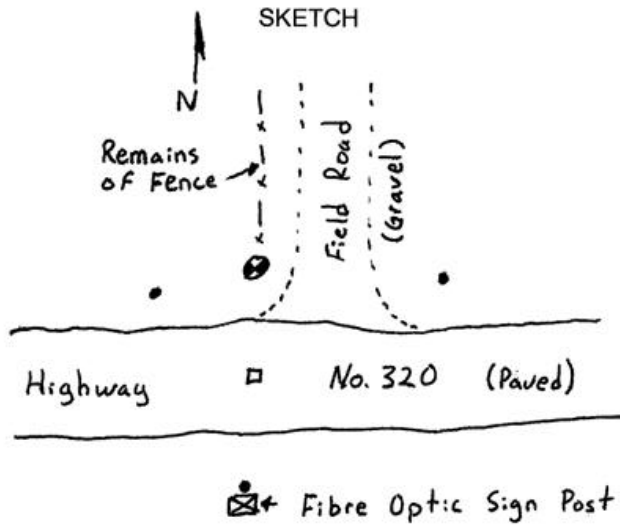

**MONUMENT (S) AND ACCESSORIES SET (Procedures and Description)**

I set a 1 1/2" x 30" galvanized iron pipe with a 2 1/4" brass cap stamped as shown in the diagram above on the section line, 30' north of the corner point as a witness monument. At the corner I set a pk nail with a 2" brass washer stamped WTS and 56295LS.

For references, I set three, 5/8" by 24" rebars with 1 1/8" plastic caps attached, stamped WTS and 56295LS as described below:

an iron rebar bears S01°38'15"E, 30.39 feet, at the base of a 4" wooden post with a burried fibre optic warning sign attached. The pin has a yellow cap attached.

an iron rebar bears N63°55'24"E, 73.39 feet, 18" below the surface with an orange cap;

an iron rebar bears N34°47'07"W, 31.14 feet, 12" below the surface with a red cap;

the brass capped witness monument bears N0°08'50"W, 30.00 feet;

The monument and references were tied using a Trimble R7/R8 RTK GPS.

Location and comments

Compass Declination

Surveyors Seal

RECEIVED BY:  
Umatilla County Surveyor  
 Date: 5-08  
 Rec'd By: KK  
 No. 08-74-B

Firm / Agency  
 Witness Tree Surveying  
 Address  
 P.O. Box G  
 Pilot Rock, Or. 97868  
 Party Chief  
 Stephen K, Haddock

REGISTERED  
 PROFESSIONAL  
 LAND SURVEYOR

*Stephen K. Haddock*

OREGON  
 JULY 9, 2001  
 STEPHEN K. HADDOCK  
 56295LS

RENEWAL DATE 6-30-09