

OREGON CORNER RESTORATION FORM

COUNTY: Umatilla DATE: 05/15/13

CORNER DESIGNATION: 3N32, T9, The East One-Quarter Corner of Section 29.

PREVIOUS RENEWALS/SURVEYS ETC.: Corner originally established by David Chaplin, under GLO Contract 107, dated September 1864, notes state: Set post for 1/4 Sec. Cor. in mound of earth with charred stake pits as per instructions. Survey 414, Book 2, Page 288, by Willard Bradley states: "found Gov. cor. 1/4 Sec's 28 & 29. Which is Gov. stake. Set porous stone, glass & coal under. In Survey No. 12-126-B, John Shea computed the corner position at the line between the Northeast and Southeast corners of Section 29 at the intersection with the centerline of Snyder Road. No monument was found or set.

MONUMENT AND ACCESSORIES FOUND: None.

MONUMENT MARKING DETAIL:

T3N R32E
1/4
S29|S28
2013
PLS 54657

MONUMENT SET: Held intersection of the centerline of Snyder Road with a line between the Northeast and Southeast corners of Section 29 as the best remaining evidence of the original corner position, At the reestablished corner position, set a 2 3/8" brass cap on a 1 1/4" x 30" galvanized iron pipe, with top 12" below road surface, stamped as stated in "Monument Marking Detail". From which:

A silver deep-1 magnet, buried 18" below ground in road bank between road and farmed field bears North 62° East, 29.2 feet.

A 5/8" x 24" rebar with a 1 1/4" purple plastic cap stamped "Wells Surveying, PLS 54657", in bank between road and farmed field, South 62 1/2° East, 31.9 feet.

A Umatilla County Road mile marker sign base at ground bears South 68° West, 48.7 feet.

An orange deep-1 magnet, buried 18" below ground, bears North 59 1/2° West, 27.0 feet.

Buried witness post sign with magnets. Attached bearing object signs to rebar and sign base.

LOCATION AND COMMENTS: At a point in centerline of Snyder Road.

OREGON STATE PLANE COORDINATE, North Zone, NAD 83(91), International Feet:

N= 749683.20'
E= 8629117.11'


FIRM: Wells Surveying
P.O. Box 1696
Pendleton, OR 97801

COMPASS DECLINATION: 18° East

Surveyor's Seal

Witnesses: Jason Wells, PLS

\3N32T9

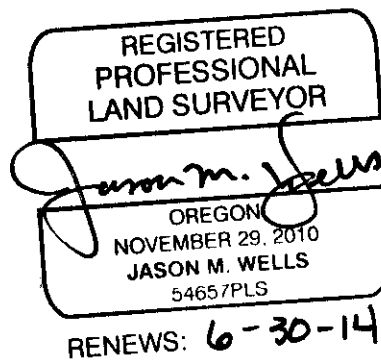

RENEWS: 6-30-14