

OREGON CORNER RESTORATION FORM

Section: 22, 23, 26, 27 Township: 3N Range: 33E
County: Umatilla Date: 6/8/2011

Corner Designation: 3N33R17

Section corner common to Sections 22, 23, 26, 27, T3NR33E.

<input checked="" type="checkbox"/>	Condition Report Only
<input type="checkbox"/>	Not Found
<input type="checkbox"/>	Remonumented
<input type="checkbox"/>	Unrecorded
<input type="checkbox"/>	Surveyed In
<input type="checkbox"/>	Referenced Out



Previous Renewals / Surveys, etc.

Originally surveyed by Chaplin in 1864. He set a post in a mound of earth.
In 1871 Moody set a post in a mound of earth.
In 1887 Currin and Noland set a basalt stone 24" x 18" x 10", 18" in the ground.
In 1985 Krumbein set a 1" iron pipe with a 2 1/2" brass cap in Survey 11-85C. This survey was not filed until after several subsequent surveys were filed, including the corners set in our survey. This creates the distinct probability that there are double corners in the survey affected by 11-85-C.
In 2009 W. Wells set a 1 1/4" x 30" galvanized iron pipe with a 2 3/8" brass cap in Survey 09-088-C.
In 2009 Roberts found a 2 1/2" brass cap in Survey 09-100-C.


Monuments and Accessories Found: (Condition and Source):

A 2 3/8" brass cap, stamped as shown below.
A 5/8" x 24" iron rebar w/RPC #1106 lies North, 31.0', flush with the surface near the corner of a lawn.
A 5/8" x 24" iron rebar w/RPC #1106 lies South, 76.4', at the North end of a fence line.
The Northeast corner of a transformer lies S 23° W, 7.6', measured 1.5' above the ground.
The most Southeasterly corner of the Bob Roselle house lies N 50° W, 148.1'.

Diagram

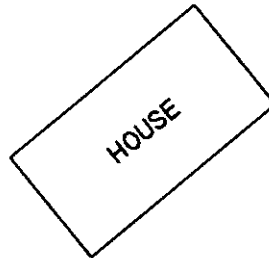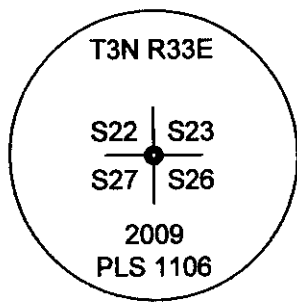


Sketch

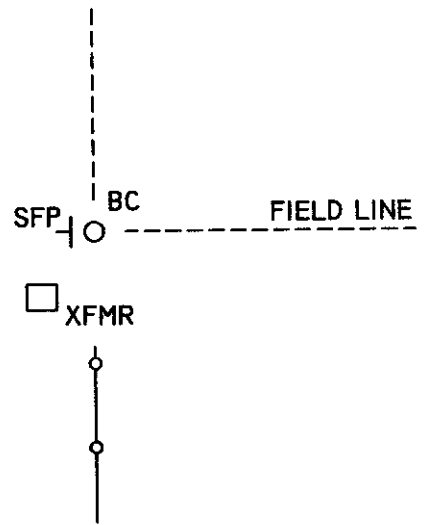

NAD 83/91
OREGON STATE PLANE NORTH
INTERNATIONAL FEET

N753210.04
E8671319.93



Monument(s) Set (Procedures and Description):

None.

References Set:

None.

Location and Comments:

The corner is located 0.4 miles North of the intersection of Hwy. 11 and Jim Rd.

Compass Declination

17° E

Surveyors Seal

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. English
OREGON
JANUARY 11, 2005
ROBERT DOUGLAS ENGLISH
43406LS

RENEWAL DATE: 12/31/13

RECEIVED BY:

Date: 7/10/2012
Rec'd By: S. Oles
No. 12-094-C

Firm / Agency

Survey One, LLC.
P.O. Box 382
Pendleton, OR 97801
(541) 276-2055