

OREGON CORNER RESTORATION FORM

Section: 29, 30 Township: 3N Range: 33E
County: Umatilla Date: 3/17/2011

Corner Designation: 3N33T05 (Amended 3/13/2012)

Quarter corner common to Sections 29, 30, T3NR33E.

_____	Condition Report Only
<u> X </u>	Not Found
<u> X </u>	Remonumented
_____	Unrecorded
<u> X </u>	Surveyed In
<u> X </u>	Referenced Out


Previous Renewals / Surveys, etc.

Originally surveyed by Chaplin in 1864. He set a post in a mound of earth.


Monuments and Accessories Found: (Condition and Source):

None.

Diagram



Sketch

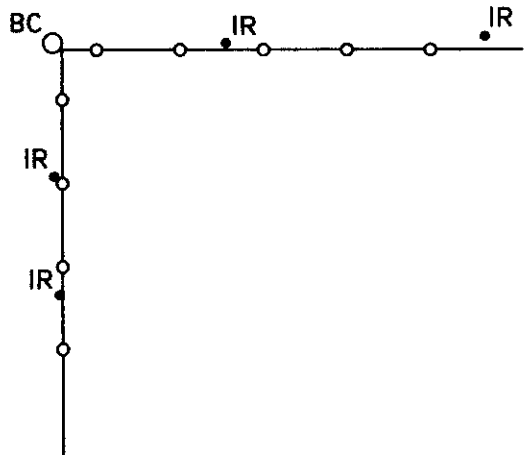

NAD 83/91
OREGON STATE PLANE NORTH
INTERNATIONAL FEET

N750137.71
E8655511.96

Monument(s) Set (Procedures and Description):

A 1 1/8" x 30" galvanized iron pipe with a 2 1/2" brass cap, stamped as shown above. Held ancient fence corner as best evidence of occupation and location of corner.

References Set:

- A 5/8" x 30" iron rebar w/RPC #43406 lies N 89° 20' E, 32.29'.
- A 5/8" x 30" iron rebar w/RPC #43406 lies S 88° 30' E, 11.42'.
- A 5/8" x 30" iron rebar w/RPC #43406 lies S 1° 10' E, 22.94'.
- A 5/8" x 30" iron rebar w/RPC #43406 lies S 0° 40' E, 10.24'.

Location and Comments:

The corner is located 0.7 miles, M/L, West Northwest of the intersection of Adams Rd. and Myrick Rd. at the intersection of two fence lines.

Compass Declination

17° E

Surveyors Seal

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. English

OREGON
JANUARY 11, 2005
ROBERT DOUGLAS ENGLISH
43406LS

RENEWAL DATE: 12/31/13

RECEIVED BY:

Firm / Agency

Date: 7/10/2012
Rec'd By: S. O'Leary
No. 12-094-C

Survey One, LLC.
P.O. Box 382
Pendleton, OR 97801
(541) 276-2055