

# OREGON CORNER RESTORATION FORM

Section 17 Township 3N Range 35E  
 County Umatilla Date: 09-06-2004

Corner Designation: 3N35E7

X \_\_\_\_\_ Condition Report Only  
 \_\_\_\_\_ Not Found  
 \_\_\_\_\_ Remonumented  
 \_\_\_\_\_ Unrecorded  
 \_\_\_\_\_ Surveyed In  
 \_\_\_\_\_ Referenced Out

Previous Renewals / Surveys, etc.  
 Corner brass cap set by Redfield in 1919.

**Monument and Accessories Found: ( condition and source )**


Found a 3.25" dia. brass cap on a 2" dia. pipe protruding 12" out of a field corner section, leaning southward, Stamped as shown in the diagram below.  
 Located at the South Center 1/16th corner section 17 the stamping is inconsistant with location.

There is a 5" dia axle shaft protruding 5' above the ground to the Northwest of the corner.

**DIAGRAM**



**SKETCH**

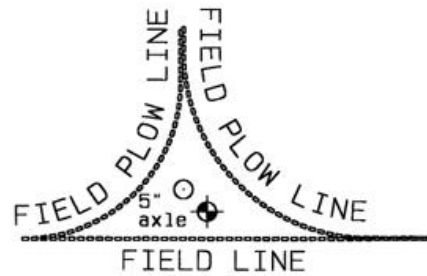

**MONUMENT (S) AND ACCESSORIES:**

Repositioned the monument straight up and buried with dirt 6" from cap. See attached photographs.

**REFERENCES:**

Single pt. GPS tie.  
 Latitude 45°44'7.2"N  
 Longitude 118°28'2.2"W  
 NAD 83 (1991)

Oregon State Plane Coord. - North Zone  
 Northing 760730'  
 Easting 8721080'  
 Ellipsoidal Height 1938'

RECEIVED BY: \_\_\_\_\_

Date: \_\_\_\_\_  
 Rec'd By: \_\_\_\_\_  
 No. 05-006-R

Firm / Agency

Haddock Surveying  
 P. O. Box 1574  
 Pendleton, OR 97801  
 (541) 276-2174

REGISTERED  
 PROFESSIONAL  
 LAND SURVEYOR

*David L. Haddock*

OREGON  
 JULY 12, 1968  
 DAVID L. HADDOCK  
 852