

OREGON CORNER RESTORATION FORM

Section 17 Township 4 N Range 29 E

J-7

County UMATILLA Date 3/95

CORNER DESIGNATION

N 1/4 Cor

- \_\_\_ Condition Report Only
- \_\_\_ Not Found
- \_\_\_ Renewed
- \_\_\_ Unrecorded
- \_\_\_ Surveyed In
- \_\_\_ Referenced Out

Previous Renewals/Surveys, etc. ORIG SUR. DAVENPORT 1861 # 101  
He set a post in mound with charred stake


1974 sur for Pat Walchli Krumboin set B.C.

Monument(s) & Accessories Found: (Condition and Source)

End Krumboin 2 1/2" B.C. W.C (28.77)  
it bears N 31° 59' E 27.34 Feet from my corner

Monument Detail

Sketch

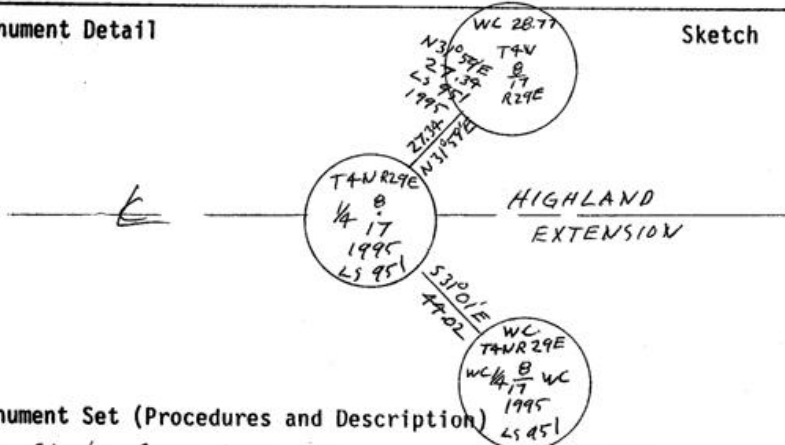

Monument Set (Procedures and Description)

By Single Proportion I  
Set 1" x 30" I. Pipe with 2 3/8" B.C. Stamped as above 5" below  
surface of Road.

SEE MY 1992-1 COUNTY PUBLIC MONUMENTATION SUR.

New Accessories

Alum Tag # 951 in P. Pole Bears N 84° 35' 10" W 292.66 FT.  
Alum Tag # 951 in P. Pole Bears N 80° 40' E 174.31 FT.  
a 1" x 30" I. Pipe with 2 3/8" B.C. Bears S 31° 00' 50" E 44.02 FT

Location & Comments

From intersection Compass Declination \_\_\_\_\_  
Canal Rd & Highland Firm/Agency EDWARDS  
90 East on Highland SURVEYING  
1/2 mile to Cor. Address P. Box 763

Surveyor's Seal

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*G. Dennis Edwards*

OREGON  
JULY 16, 1971  
G. DENNIS EDWARDS  
951

RENEWS 12/31/95

RECEIVED BY \_\_\_\_\_  
Umatilla County Surveyor \_\_\_\_\_  
Date \_\_\_\_\_  
Rec'd By \_\_\_\_\_  
No. 95259-B

Party Chief D. EDWARDS  
Notes \_\_\_\_\_  
Witness J. COPPOCK