

CORNER RESTORATION FORM

Township 4N Range 29E Section 18 & 19 County UMATILLA

State OREGON Date 3/30/2023 Number N-3

Corner Designation : 1/4 CORNER: 18, 19

Condition Report Only
 Not Found
 Renewed
 Surveyed In
 Referenced

Previous Renewals ORIGINAL SOURCE OF CORNER


ORIGINALLY SURVEYED IN 1861 BY DAVENPORT UNDER
 CONTRACT #101, HE SET A STAKE IN MOUND OF EARTH
 1980 EDWARDS SET A 2 3/8" BRASS CAP COUNTY SURVEY NO.
 17-021-A
 1989 EDWARDS SET A 2 3/8" BRASS CAP COUNTY SURVEY NO.
 89-137-B & CORNER FORM NO. N3-89-137-B

BASIS OF BEARINGS, NAD 83/91 OREGON STATE PLANE COORDINATES NORTH ZONE:

NORTHING: 787694.36
 EASTING: 8524323.70

MONUMENT DETAIL

Found Set

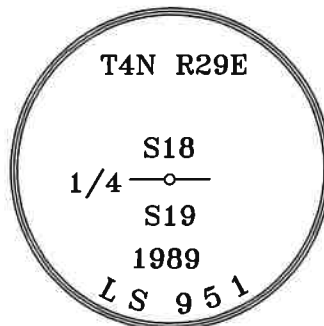

Monument & Accessories Set/Found (Procedure and Description)

AT CORNER FOUND 2 3/8" BRASS CAP 2" DEEP & UMATILLA MON. SIGN, AS PER COUNTY SURVEY NO. 89-137-B

FOUND 5/8" IRON ROD WITH ALUMINUM CAP N 01°04' W 4.95', CORNER FORM NO. N3-89-137-B


FOUND 5/8" IRON ROD WITH ALUMINUM CAP S 88°58' W 4.99', CORNER FORM NO. N3-89-137-B

FOUND 5/8" IRON ROD W/YELLOW PLASTIC CAP "PLS LS 48490" S 83°49' E 18.05', CORNER FORM NO.

N3-21-004-C

SET P.K. NAIL W/WASHER "PLS 61420" IN CONC. PAD OF OLD WELL S 17°59' W 75.60'

Sketch of Monument, Accessories and General Area

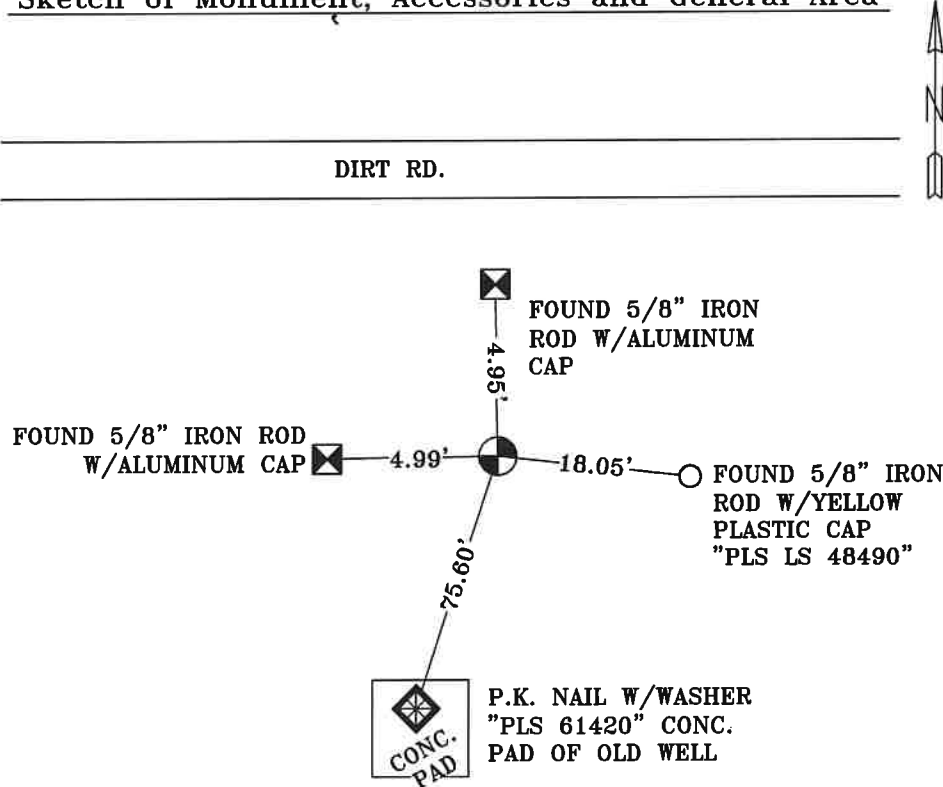

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Lance Clark King
**OREGON
MAY 10, 2011
LANCE CLARK KING
61420**

RENEWS: 6/30/2023

Agency:

CK3, LLC
 945 W. ORCHARD
 HERMISTON OREGON 97838
 OFFICE: 541-567-2345
 FAX: 541-567-2305
 WEB: CK3LLC.NET
 Field Book # 0-350

**COUNTY SURVEYOR
RECORDING INFO**

Received CT
 Filed 5/4/23
 Survey No. 23-042-C
 Drawing No. _____
 Index No. N-3