

CORNER RESTORATION FORM

Township 4N Range 29E Section 33, 34 County UMATILLA

State OREGON Date 3/30/2023 Number X-13

Condition Report Only

Corner Designation : 1/4 CORNER: 33, 34

Not Found
 Renewed

Previous Renewals ORIGINAL SOURCE OF CORNER

Surveyed In
 Referenced

ORIGINALLY SURVEYED IN 1861 BY DAVENPORT UNDER

CONTRACT #101, HE SET A STAKE IN MOUND OF EARTH

MONUMENT DETAIL

1995 EDWARDS SET A 1"X30" I.P. W/ 2-3/8" BRASS CAP BY


Found Set

SINGLE PROPORTION COUNTY SURVEY NO. 95-060-B &

CORNER FORM NO. X13-95-060-B

BASIS OF BEARINGS, NAD 83/91 OREGON STATE PLANE
 COORDINATES NORTH ZONE:

NORTHING: 774813.24
 EASTING: 8537702.79



Monument & Accessories Set/Found (Procedure and Description)

AT CORNER FOUND A 2 3/8" BRASS CAP 2" BELOW GRADE, COUNTY SURVEY NO. 95-060-B & CORNER FORM NO. X13-95-060-B


FOUND A ALUMINUM TAG 951 ON POWER POLE N 05°23' E 145.53', CORNER FORM NO. X13-95-060-B

FOUND A 5/8" IRON ROD W/YELLOW PLASTIC CAP "PLS IS 48509" N 40°20' W 62.84', CORNER FORM NO. X13-01-213-G

FOUND A 5/8" IRON ROD W/YELLOW PLASTIC CAP "PLS IS 48509" S 78°40' W 59.33', CORNER FORM NO. X13-01-213-G

SET A P.K. NAIL W/WASHER "PLS 61420" & SET UMATILLA MON. SIGN ON P.P. S 26°50' W 20.21'

Sketch of Monument, Accessories and General Area

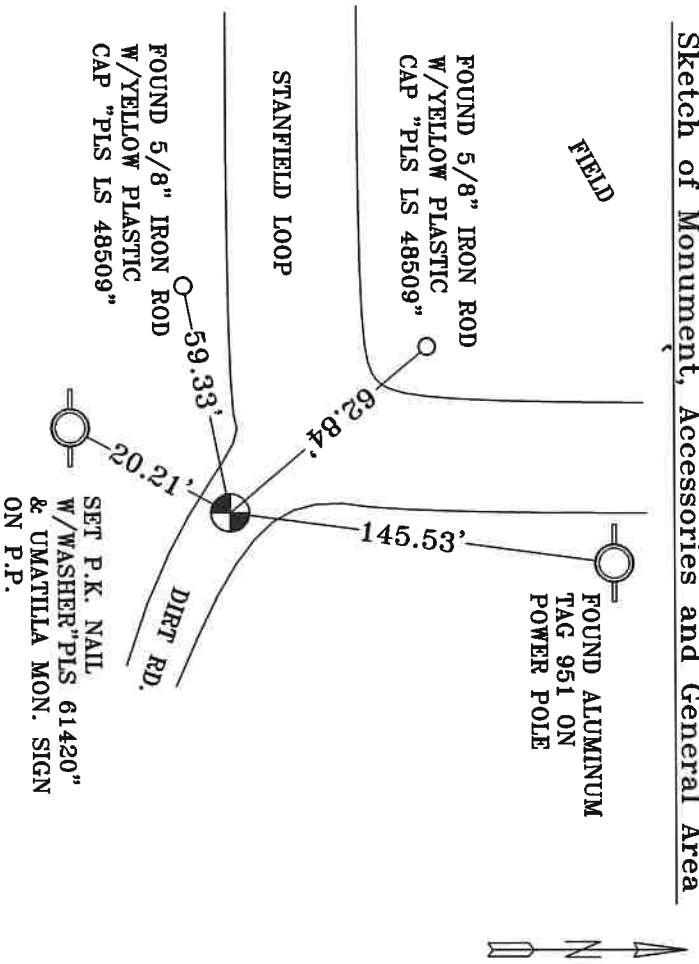

**REGISTERED
 PROFESSIONAL
 LAND SURVEYOR**

Lance Clark King
OREGON
 MAY 10, 2011
LANCE CLARK KING
 61420

RENEWALS: 6/30/2023

Agency: **CK3, LLC**
 945 W. ORCHARD
 HERMISTON OREGON 97838
 OFFICE: 541-567-2345
 FAX: 541-567-2305
 WEB: CK3ILC.NET
 Field Book # 0-350

**COUNTY SURVEYOR
 RECORDING INFO**

Received CT
 Filed 5/4/23
 Survey No. 23-042-C
 Drawing No. _____
 Index No. X-13