

OREGON CORNER RESTORATION FORM

COUNTY: Umatilla. DATE: 09/28/18.

CORNER DESIGNATION: E-5, The Northeast corner of Section 7, Township 4 North, Range 33 East, W.M.

PREVIOUS RENEWALS/SURVEYS ETC: Corner was originally established by Odell and Lewis, Deputy Surveyors, under Contract No. 110, dated February 7, 1865. Notes state:

Set post corner for Secs. 5, 6, 7 & 8. Drove charred stake. Dug pits and raised mound as per instructions.

MONUMENT AND ACCESSORIES FOUND: None. Reestablished corner at the intersection of A North-South field berm with a field berm extending East.

MONUMENT MARKING DETAIL:

T4N R33E
S6 | S5

S7 | S8
2018
PLS 1106

MONUMENT SET: Set a 2 3/8" brass cap on 1 1/4 by 30" galvanized iron pipe 29 inches in the ground. Cap marked as shown in Monument Marking Detail.

New accessories:

- A Blue Deep 1 magnet bears S 31° W, 14.1'
- A Orange Deep 1 magnet bears N 23° W, 14.2'
- A 5/8" by 24" rebar with red plastic cap bears N 87° E, 9.3'
- A 5/8" by 24" rebar with red plastic cap bears S 26° E, 17.9'.

Red plastic caps are marked "ORPLS 1106 WAPLS 17372". All rebar accessories have "bearing object" signs wired to them. Deep 1 magnets are buried 15" below ground line. "Bearing Object" signs are buried beside each Deep 1 magnet.


Set steel fence post 1.5' North of corner and attached Witness" sign.

LOCATION AND COMMENTS: Corner is located at the intersection of a North-South field berm with a field berm extending East.

FIRM: Wells Surveying
P.O. Box 1696
Pendleton, OR 97801

Surveyor's Seal

IAN33E-5

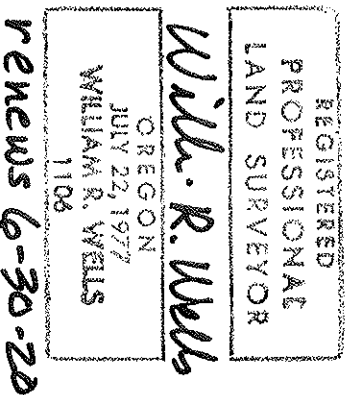

renews 6-30-20

RECEIVED BY
 Umatilla County Surveyor
 Date: 10/11/2018
 Rec'd By: JMA
 No.: 18-087-R