

OREGON CORNER RESTORATION FORM

Section 8 Township 5N Range 36E
 County Umatilla Date: September 24, 2012

Corner Designation: 5N36J5

Condition Report Only
 Not found

Corner common to sections 7, 8, 17, and 18,
 T5N, R36E, W.M., Umatilla County, Oregon.

x Remonumented
 Unrecorded
 Surveyed in
x Referenced out


Previous Renewals / Surveys, etc.

Corner was originally set by Odell and Lewis under contract No. 110 dated February 7, 1865. Their record reads: Set post corner for secs. 7, 8, 17 and 18. Drove charred stake, dug pits, raised mound, as per instructions.


Monument and Accessories found: (condition and source)

A basalt stone 11x7x6 ins. on the east side of a locust field marker post at the intersection of field lines to the north, east, and west.

DIAGRAM

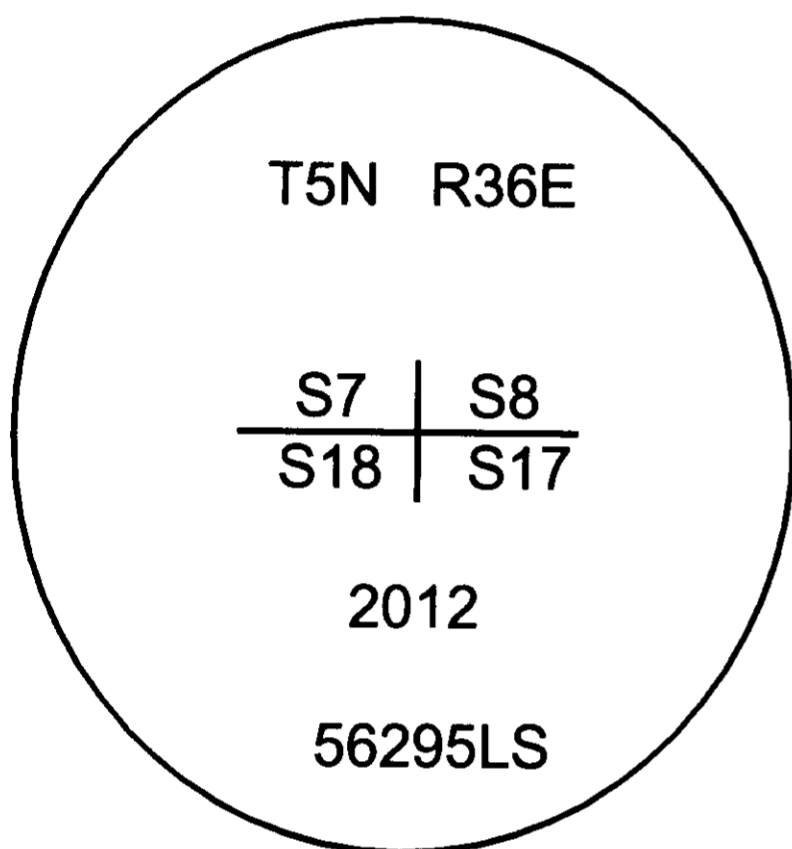

SKETCH

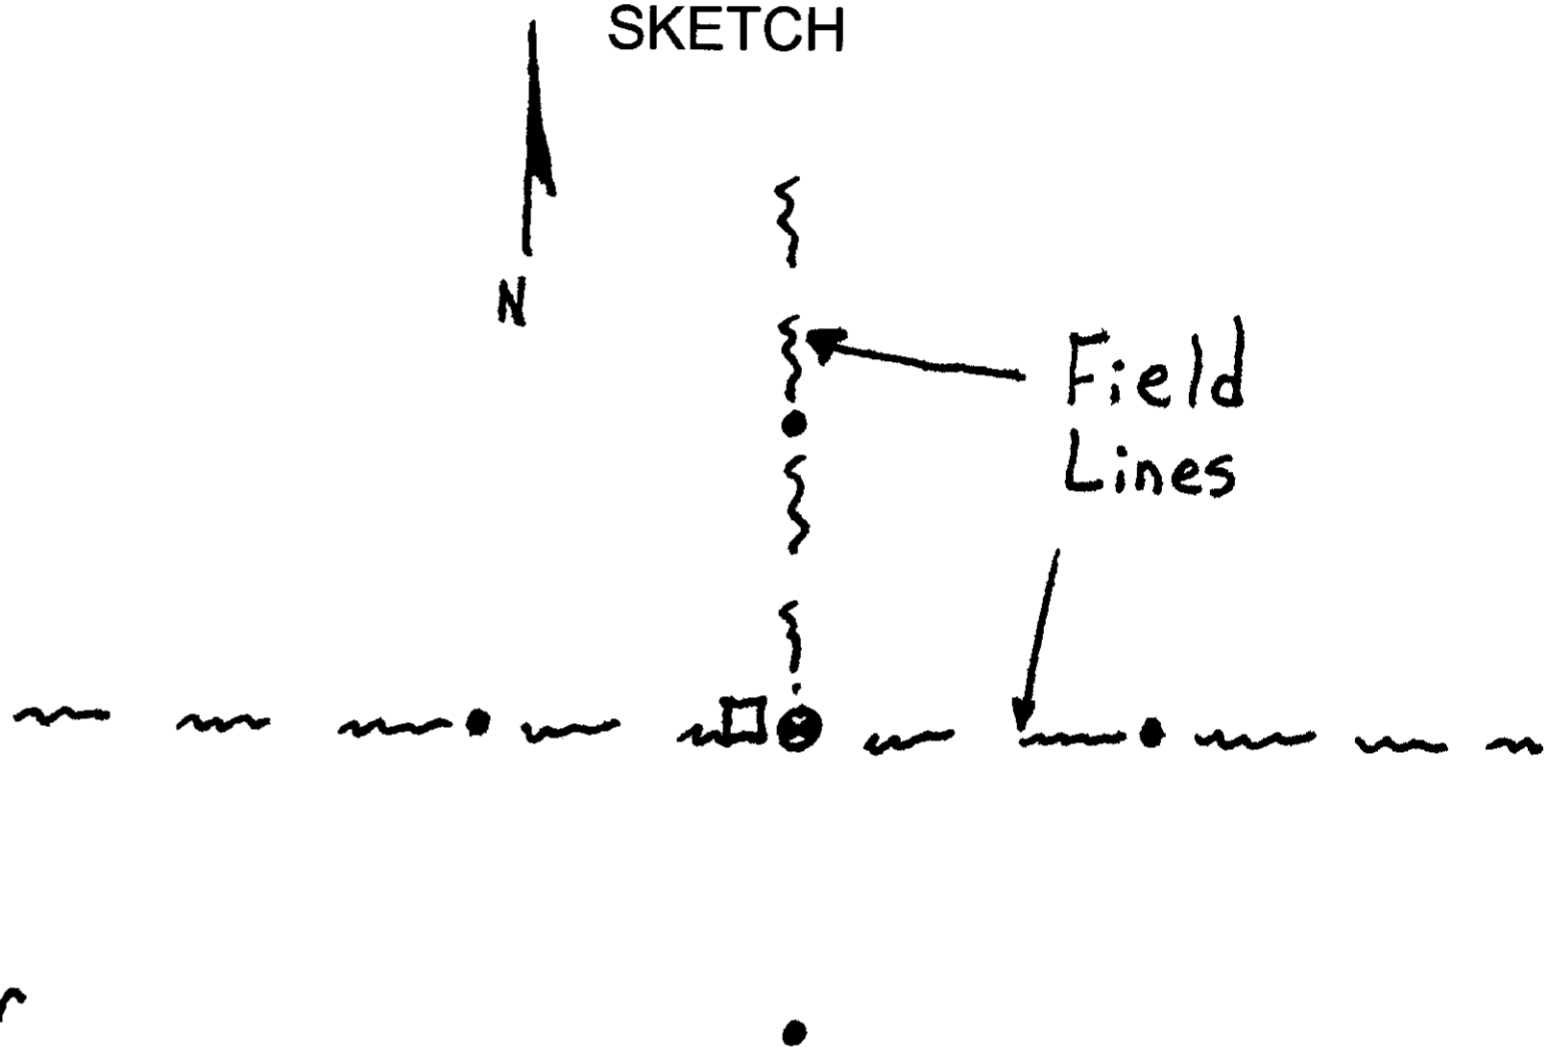

- = Locust Field Marker
- ⊙ = Brass Cap
- = Rebar Reference

MONUMENT (S) AND ACCESSORIES SET (Procedures and Description)

I set a 2 3/8" brass cap on a 1 1/2"x30" galvanized iron pipe with a brass cap stamped as shown in the diagram above at the position of the found stone.

For references: I set 4, 5/8"x24" iron rebars with orange plastic caps stamped WTS and 56295LS as described below 20 inches below the surface of the ground:

- An iron rebar bears S87°56'29"W, 31.96 feet;
- An iron rebar bears N2°31'44"E, 31.09 feet;
- An iron rebar bears S89°37'53"E, 29.15 feet;
- An iron rebar bears S0°18'02"E, 30.45 feet;

The monument and references were tied using a Trimble R7/R8 RTK GPS system.

Location and comments

Compass Declination

Surveyors Seal

NAD 83/1991 State Plane Coordinate

Oregon North Zone

N = 827957.99 ift

E = 8748835.74 ift

Firm / Agency

Witness Tree Surveying

Address

P.O. Box G

Pilot Rock, Or. 97868

Party Chief

Stephen K, Haddock

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

Stephen K. Haddock

OREGON
 JULY 9, 2001
 STEPHEN K. HADDOCK
 56295LS

RECEIVED BY:

Umatilla County Surveyor

Date: 12/6/2012

Rec'd By: S. Ous

No. 12-155-B

RENEWAL DATE 6-30-13