

USDA-FOREST SERVICE

Index 2-9
File No. _____

CORNER RECORD (SEARCH)
(Ref. FSM 7151.4)

Tract or Survey No. _____
Cor. No. _____


T 5N R. 38E

R.D. W² County UMATILLA

Merid. WILL

N.F. UMATILLA State OREGON

CORNER DIAGRAM

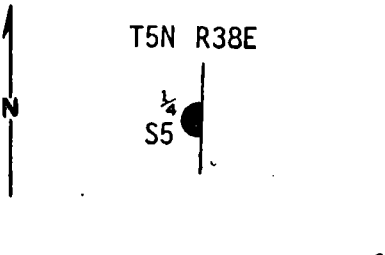

DESCRIBE CORNER MONUMENT FOUND

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

Description of corner evidence found: A diligent search was made and no evidence of the original post or BT's could be found.

Object Ident. _____
Ident. By _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency _____

Signature HOWARD L. PERRY Title PLS Division 1294 Headquarters _____ Date 9/80 7100-52-(3.68)

CORNER RECORD (PERPETUATION)

Description of monument and accessories established to perpetuate the

original location of this corner: At surveyed point set 1"x30" galvanized pipe with 3" brass cap stamped: Set pipe 23" in ground with mound of stone and dirt to cap.

Bearing Trees

A Blue Spruce 7" dia. bears N24⁰ W, 444 ft. scribed ¼ S5 BT
 A Blue Spruce 8" dia. bears S76⁰ W, 25.5 ft. scribed ¼ S5 BT
 Attached 54-3 and 54-4 signs to both BT's. Painted 6" band around both BT's red. Attached brass washer stamped LS 1294 to foot blaze of both BT's.

CROWN ZELLERBACH

T5N R38E

¼

S5

1980

OR PLS 1294

Work Done By _____ Title _____ Date _____ State Registration No. or Agency _____ 10

Certified Cor. Record Prepared Yes No Filed At: _____ Date _____ 11

REMARKS

Index File No. T. R. M. Tract or Survey Cor. 12

C-9 5N 38E

C-9a

EAST 1/4 OF SEC. 5 T5N R38E

ORIG. SURVEY BY WILLIAMS IN 1872

RETRACEMENT BY CAMPBELL IN 1899

SEARCH AREA LOCATED BY MEASUREMENT

FROM $\frac{S}{B}$.

NOTES CALL FOR "YEW" BT'S. THERE IS CONSIDERABLE YEW IN THE AREA, ALTHOUGH FEW EXCEED 6" IN DIAMETER AND MOST HAVE MULTIPLE SCARS FROM LOGGING AND OTHER INJURIES.

ORIG. BT'S WERE 5" AND 8" IN DIAMETER.

ENTIRE AREA HAS BEEN HEAVILY LOGGED AND NO EVIDENCE OF CORNER COULD BE FOUND

5-29-80


Greg Orton ORS 1099
GREG ORTON

COMPASS DECL. 1952 EAST

US
INC
FILE

T

Meas
Cont



PHC

PHC

FILE

Ob

Id

PLA

Stc

X

Y

Est