


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

J-11

**History of original corner establishment:**


1882, George S. Pershin, U.S. Deputy Surveyor, while subdividing the township under G.L.O. Contract No. 430 established the corner as follows:  
Set a basalt stone, 12 x10 x 5 ins., 8 ins. in the ground on slight East slope for 1/4 sec corner, marked 1/4 on N. face  
A pine 22 in. diam bears N. 52° E., 48 lks dist. marked 1/4 S. B.T.  
A pine 30 in. diam. bears S. 26° E. 31 lks dist. marked 1/4 S. B.T.

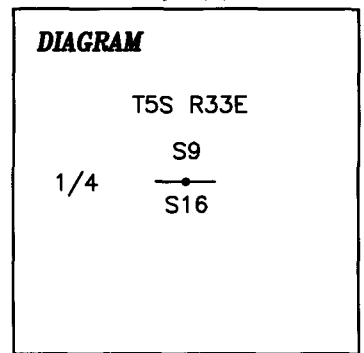

1977, Craig L. Wanless, BLM Cadastral Surveyor, found the 1/4 cor. of secs. 9 and 16, monumented with the original basalt stone, 12 x 10 x 5 ins., loosely set 1 in. in the ground, mkd. 1/4 on N. face, from which the remains of the original bearing trees:  
A decayed pine stump, size indeterminate. bears N. 52° E., 48 lks. dist., with scribe marks 1/4 S BT visible on open blaze.  
At corner point  
Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap, from which new bearing trees  
A lodgepole pine, 10 ins. diam., bears N. 60° E., 28 lks. dist., mkd. 1/4 S9 BT.  
A lodgepole pine, 10 ins. diam., bears S. 16° W., 53 lks. dist., mkd. 1/4 S16 BT.  
Deposit corner stone and set 5 ft. steel fence post alongside iron post.

**Description of corner evidence found:**

Found a 2 1/2 ins. diam. iron pipe, with 3 1/4 in. brass cap as shown, projecting 6 ins out of the ground, located by a rock jack and gate post in barbed wire fence.

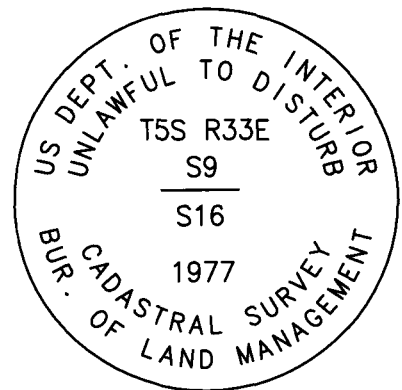

No BT's found. Multiple stumps sawn flush with ground in the area.

**Description of monument and accessories I established to perpetuate the original location of this corner:**

**New References:**

A 13 in. Pine bears N 44° E, 70.2 ft. to center, scribed 1/4 S9 BT.  
A 15 in. Pine bears S 30° W, 37.4 ft to center, scribed 1/4 S16 BT.

The new bearing trees have a 2" aluminum washer stamped "2645" fastened to the base of blaze with magnetic "PK" nail.

Reference bearings were observed with a Ranger hand held compass

See Survey # 14-006-C

Date:  
Declination: 17° East  
Witness: Robert Flora

